

## INDOOR AND OUTDOOR SOUNDERS



Indoor and outdoor sounders to connect directly to control panel outputs or relay modules.

### SIR-24B AND SIR-24BL SOUNDERS

- Indoor and outdoor sounder manufactured in red ABS.
- Large sound volume. Low consumption.
- 32 selectable tones. Volume control.
- Automatic synchronization.

Voltage range \_\_\_\_\_ 9-28 Vdc  
 Consumption (using tone 3) \_\_\_\_\_ a 24 Vdc 16 mA  
 Output volume (tone 3) \_\_\_\_\_ a 24 Vdc 102 dB (A)  
 Operating temperature \_\_\_\_\_ -25°C to +70°C  
 Size \_\_\_\_\_ Ø93 x 63 mm / Ø93 x 107 mm (SIR-24BL)  
 IP Protection \_\_\_\_\_ IP65



### CAE-PL SOUNDER

- Outdoor sounder manufactured in red ABS.
- Back cover to protect internal wiring.
- Works as power sounder at 24 V.
- Piezoelectric loudspeaker.

Activation \_\_\_\_\_ By application of supply  
 Power supply \_\_\_\_\_ 24 Vcc  
 Power \_\_\_\_\_ 85dB / 112 dB  
 Cycles \_\_\_\_\_ 2 / 3 / 5 / 10 cycles  
 Timing per cycle \_\_\_\_\_ 60 seg ON / 30 seg OFF  
 LEDs \_\_\_\_\_ 2 LEDs voidable option  
 Size \_\_\_\_\_ 220 x 315 x 70 mm  
 Current / Consumption \_\_\_\_\_ 900 mA




### CAEPLH SOUNDER

- Outdoor sounder manufactured in red ABS.
- Back cover to protect internal wiring.
- Works as power sounder at 24 V.
- Piezoelectric loudspeaker.

Activation \_\_\_\_\_ By application of supply  
 Power supply \_\_\_\_\_ 24 Vcc  
 Power \_\_\_\_\_ 85 dB / 112 dB  
 Cycles \_\_\_\_\_ 2 / 3 / 5 / 10 ciclos  
 Timing per cycle \_\_\_\_\_ 60 seg ON / 30 seg OFF  
 LEDs \_\_\_\_\_ 2 LEDs voidable option  
 Size \_\_\_\_\_ 320 x 218 x 77 mm  
 Current / Consumption \_\_\_\_\_ 900 mA  
 Protection \_\_\_\_\_ IP65

# Wiring Diagrams

## SIR-24B AND SIR-24BL SOUNDER

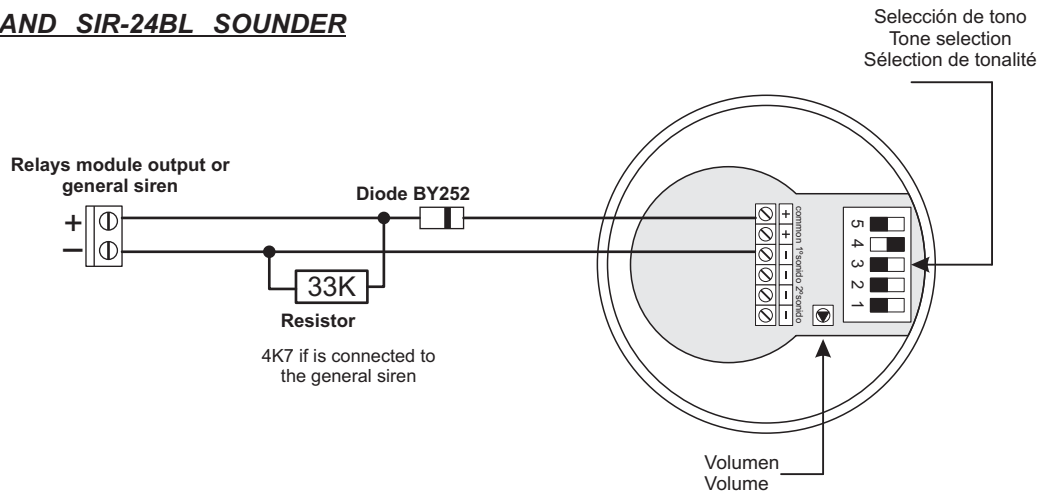

## CAE-PL AND CAEPLH SOUNDERS

