


CODE: **AWO350 v1.1**
 NAME: **LED/B**

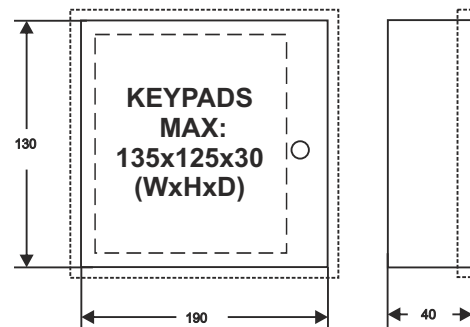

DESTINATION

DSC

KEYPADS: PC 500 RK, PC 1500 RK, PC1555 RK, PC 1575 RK, PC 2550 RK, PC3000 RK

FBI

KEYPADS: XK 206, STOCK 406, 6805, XL 4600 SM, XL 4612 SM, XK7LC, XK708

SCANTRONIC

KEYPADS: KP600L, EKP1, SIC-1L, KP 2000

ROKONET

KEYPADS: RP 296 KLC, RP 296 KLS, RP 296 KL8, RP 296 KL16,

PARADOX

KEYPADS: 626, 629, 633, 639

NAPCO

KEYPADS: RP1054E, RP1016E, RP1000E, GEM-RP2AS, GEM-RP3S, GSM-RP8, GEM-RP1Cae2, GEM-RP2Ase2, GEM3Se2

SUMMIT

KEYPADS: LED 3106, LCD 3108, PENTA

SATEL

KEYPADS: CA5 KLCD-S

TECHNICAL DATA

Casing Dimensions:	internal: W=190, H=130, D=40 external: W1=195, H1=135 [mm, +/-2]
Keypads Dimensions:	max: W=135, H=125, D=30 [mm, +/-2]
Weight net/gross:	0,70kg / 0,75kg [+/-0,1kg]
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts
Closing:	lockable (MR 008 - different code)
Notes:	removable back mounting plate
Certification, declaration:	RoHS